



Waarderveldweg 3 2031 BK Haarlem The Netherlands

Tel +31 23 5149900 Fax +31 23 5322583 Email: sales@intercel.nl

SPECIFICATIONS – Model 3602R CHARGER

Totally Automatic Switch-Mode Battery Chargers

"Suitable for Gel, Sealed & Wet Lead Acid Batteries"

Summary: 36Volts, 1Amp Constant Current
(Equivalent to 2A tapered charger in charging time)

- **Input 230VAC (range 190VAC to 264VAC)**
- Suitable for UK, Europe & other 230VAC countries.
- Automatic Cut-off and then true Float. Can be left connected indefinitely without harming the battery.
- **De-sulfation of battery. Increases battery life.**
- **CE, TUV & GS approved.**
- Suitable for off-board application. Optional on-board inhibit can be provided.
- Many advance features described in this spec.
- **Very small size and very lightweight**

Explanation of the Features:

The advance technology of the OEM Battery Chargers supplied by Soneil is fundamentally different from other battery chargers. The conventional linear battery charger is an electrical device whereas the 3602R is a light weight sophisticated electronic device.

Model 3602S is available for 115VAC applications.

1. Switch-Mode Technology:

Most of the battery chargers use linear technology, which convert the 230VAC to 36VDC at 50 Hz. This requires a large transformer, which has the disadvantage of lower efficiency resulting in higher heat generation, larger size and weight.

Soneil's Battery Charger transforms the 230VAC into 36VDC at about 100,000 Hz (1667 times faster than conventional charger), which requires a much smaller



transformer and this results in a unit of smaller size, low weight and improved efficiency.

The 3602R uses sophisticated electronic circuitry with microchips. All present day computers use switch-mode technology.

2. **International Safety Approvals & Listing:**

Both CE, TUV & GS listed.

3. **Input Requirements:**

a) 190VAC to 264VAC

b) 47 - 63 Hz

Input AC tolerance +/- 20%. This means 3602R will operate satisfactorily in areas where the input voltage is low.

This charger is also **suitable for every part of the world** where 230VAC is used.

4. **Output:**

1 Amps Constant Current @ 36Volts DC
(Equivalent to 2Amps tapered charger in charging time)

a) Line Regulation @ Full Load 1%

b) Load Regulation @ 4%

c) **Ripple Voltage:** Very low 1%

The peak to peak ripple voltage into a resistive load is less than 200mV for the output voltage above 36VDC.

5. **Charging Cycle:**



The charging curve is attached. The explanation of the charging cycle is as following.

| Stages | Condition | Mode* | Current | Voltage | LED Indication |
|---------|-----------------------|-----------------|--------------------|-----------------|----------------|
| Stage 1 | Charging Pulse mode | Pulse mode | 1A Pulsing | 0.5V to 5.0V | Flash |
| Stage 2 | Constant Current mode | CC mode | 1A | 5.0V to 43.2V | Yellow |
| Stage 3 | Constant Voltage mode | CV mode | Reduces from 1A*** | Holds at 43.2V | Yellow |
| Stage 4 | Standby Voltage mode | Standby CV mode | Reduces to zero | Maintains 41.4V | Green |
| | Recharging mode | CC mode | 1A | 41.4V | Yellow |

* CC mode = Constant current charge

* CV mode = Constant voltage charge

*** See Stage 3 description below

Stage 1: Deep Discharge Charging Pulse Mode: LED Flash

The charger starts charging at 0.5V and give Pulse current up to 5V. This has effect of removing loose sulfation formed during deep discharge state of the battery.

Stage 2: Constant Current Mode (CC): LED Yellow

The charger changes to constant current 1A. When the battery voltage reaches up to 43.2V, the charging stage changes from CC (Constant Current) to CV (Constant Voltage) mode.

Stage 3: Constant Voltage Mode (CV): LED Yellow

In this stage the voltage of each cell in the battery is equalized. The charger holds the battery at 43.2V and the current slowly reduces. When the current reaches at 0.5CC (CC=Constant Current), this point called the Switching Point. The Switching Point is one of the great feature of this battery charger that it can adjust the current automatically according to battery capacity. Other chargers are not capable to adjust the current automatically.

Stage 4: Standby Constant Voltage Mode: LED Green

The charger maintains the battery voltage at 41.4V and current slowly reduces to zero. Charger can be left connected indefinitely without harming the battery.

Recharging: LED Yellow

If the battery voltage below down to 41.4V, the charger changes from any mode to Constant Current mode and restart charging. The charging cycle will go through Stage 2 to Stage 4.

Soneil charger can charge gel, sealed or wet lead acid batteries without use



of any switch.

6. **Two colours and function in one LED:**

LED is used to show the charging status. When the LED is Yellow, the charger is in charging or recharging mode and the current is 1A constant. When the LED Green, the charger is in Standby mode and no current (zero) is flowing.

7. **Protection:**

a) **Reverse polarity protection** - provided

b) **Short circuit protection** - provided

c) **Over-Voltage Protection** - provided

d) **Over current protection** - provided

e) **AC Surge Protection** - provided

f) **Soft start and stop:** Starts and stops gradually.

No sudden in-rush of current. This protects both the batteries and any other circuits connected to the charger.

8. **De-sulfation of battery:** The charger will remove loose sulfation and increase the battery life. (Hard sulfation cannot be reversed).

9. **Electromagnetic Interference (EMI):**

The charger will not generate excessive radiated or conducted emissions. No interference with TV, radio, computer or other equipment.

10. **On-board Feature:** Optional

The optional model has a third output wire, which provides an Inhibit signal that will prohibit the operation of the vehicle's motor controller whenever the charger is plugged to an AC source.

Inhibit signal: The Inhibit signal is an open circuit output, leakage less than 5



microAmp or less, when the charger is not connected to an AC source. This signal will be less than 50 mV DC while sinking 10 mA when the charger is connected to an AC source.

11. **Size & weight: Very Small**

Length - 4.3" (110 mm)

Width - 2.4" (60 mm)

Height - 1.2" (30 mm)


Weight: 14 Oz (400 grams)

Ref: 3602R.022701



CHARGING CURVE MODEL 3602S&R

SONEIL 36V/2A CHARGER
(1A CONSTANT CURRENT)

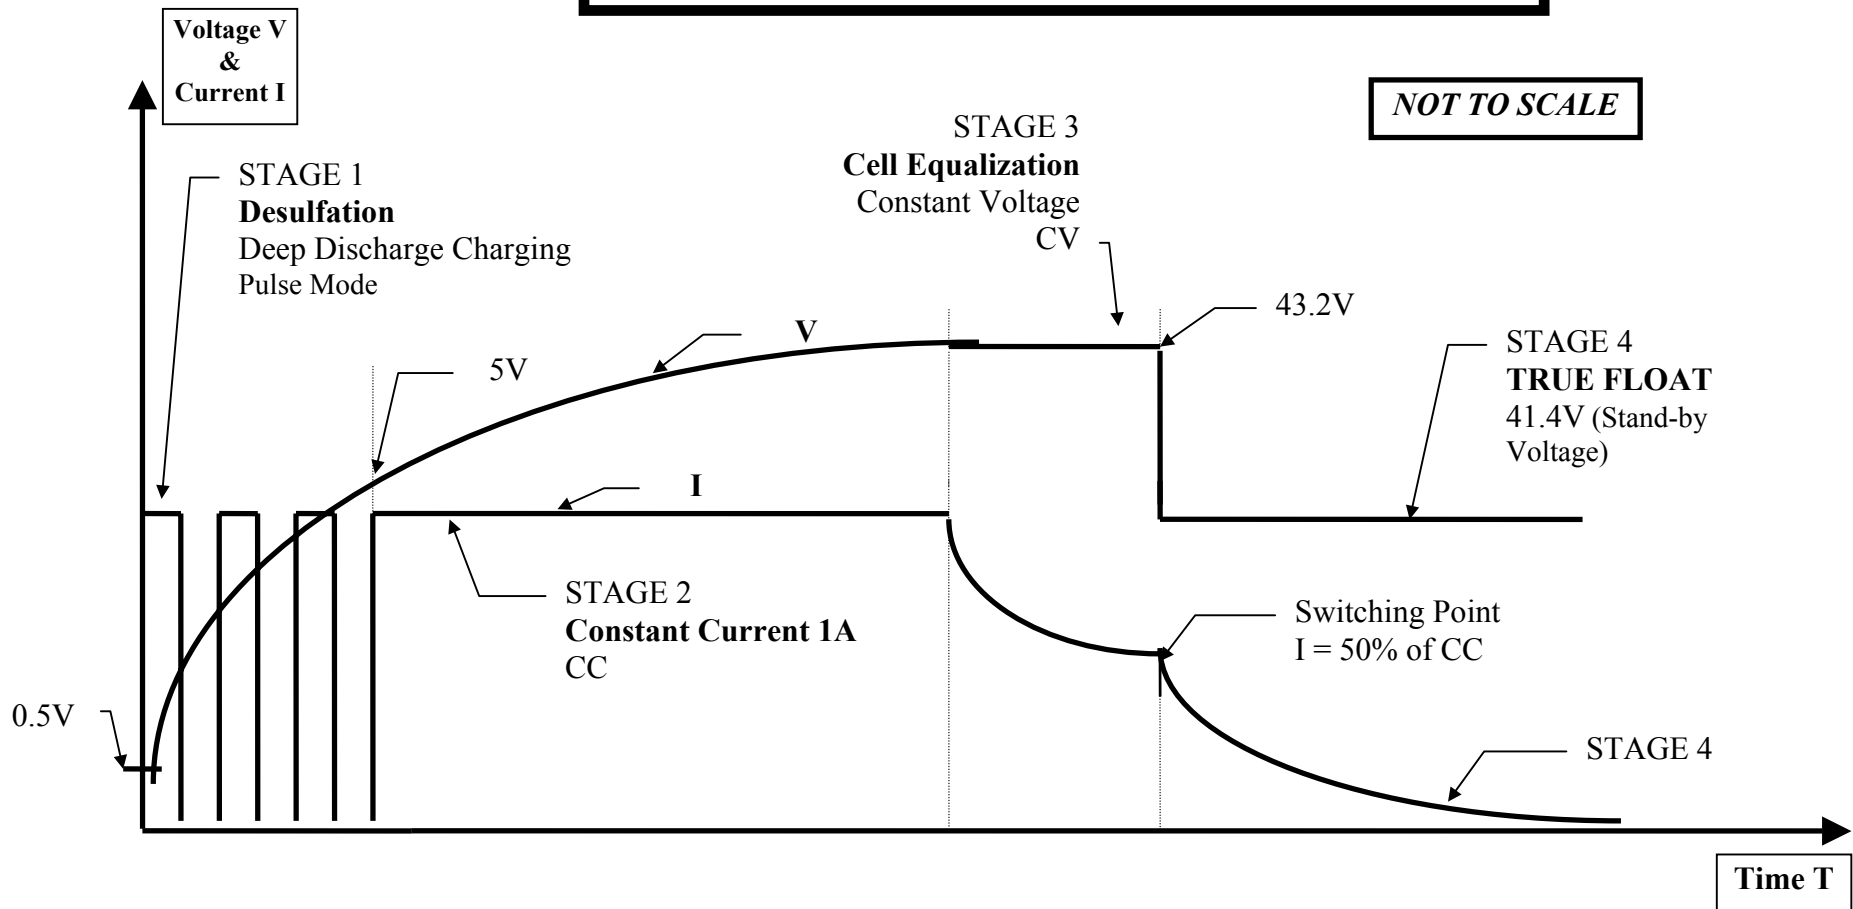

Ref: Curve3602S&R.23-Jan-04




intercel

MORE THAN BATTERIES

Waarderveldweg 3 2031 BK Haarlem The Netherlands

Tel +31 23 5149900 Fax +31 23 5322583 Email: sales@intercel.nl

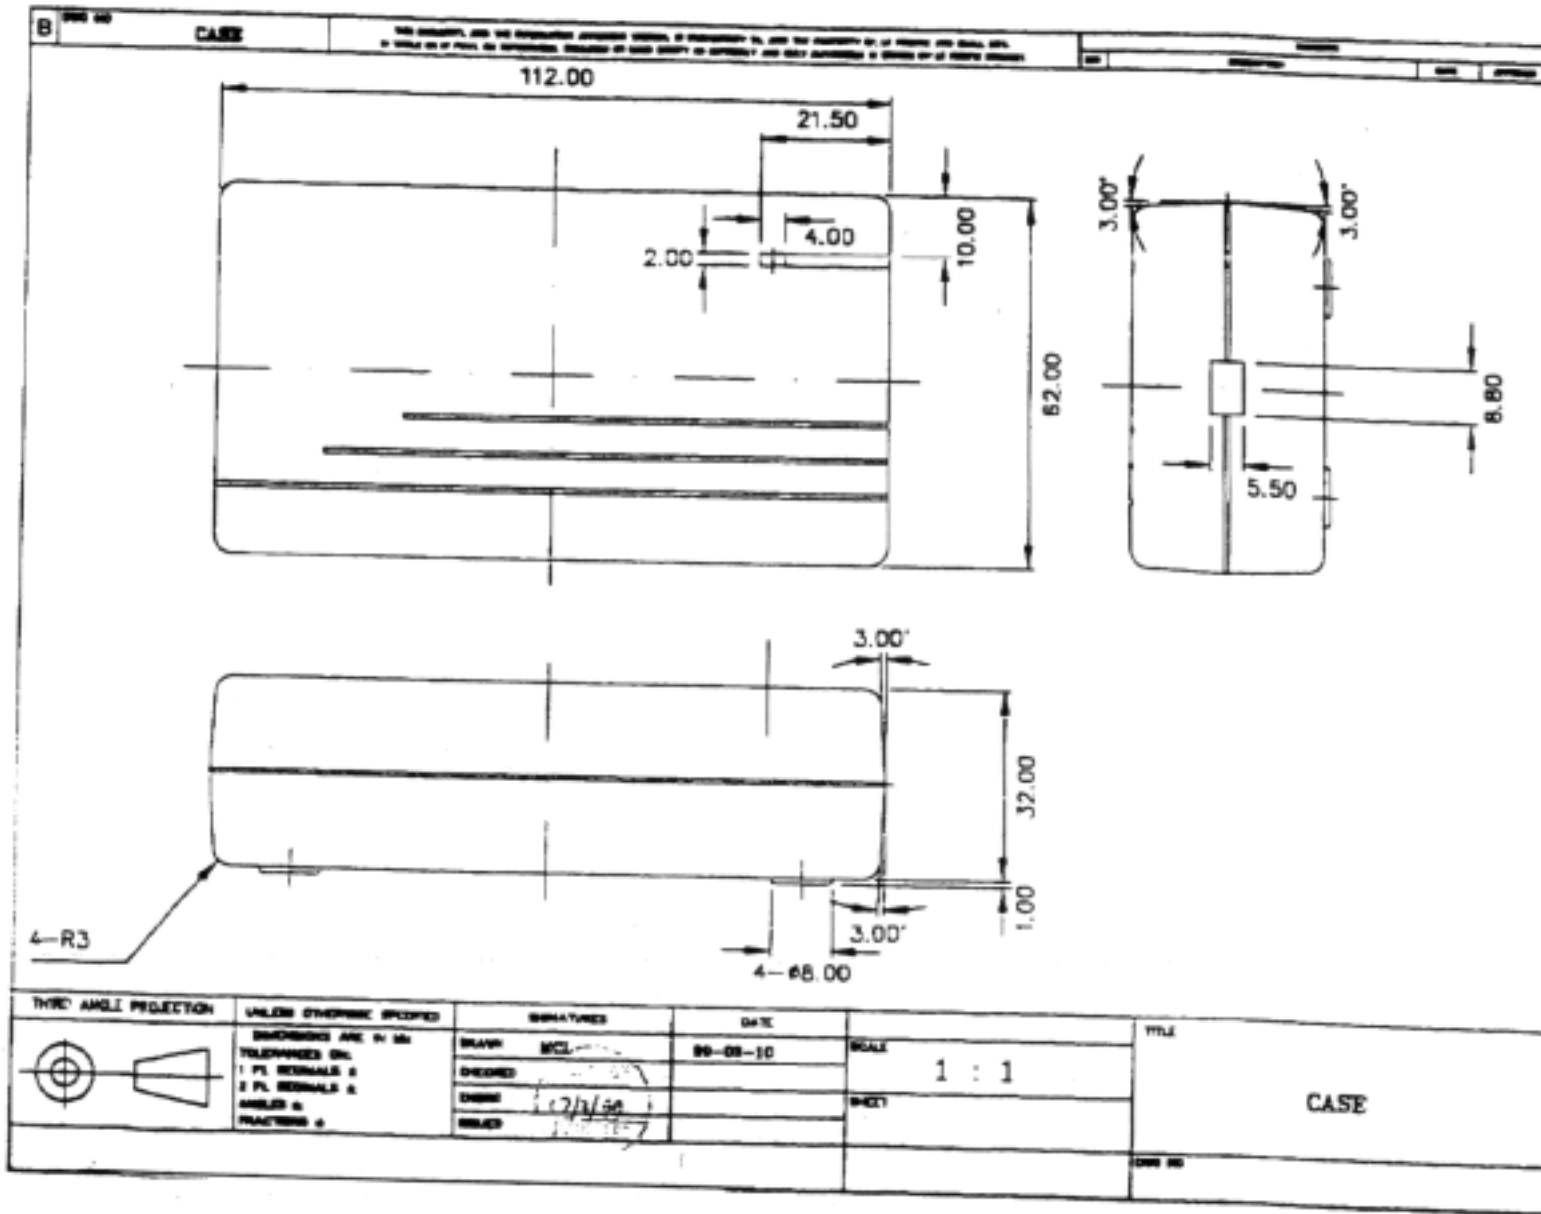

intercel

Waarderveldweg 3 2031 BK Haarlem The Netherlands

MORE THAN BATTERIES Tel +31 23 5149900 Fax +31 23 5322583 Email: sales@intercel.nl