


## INTERCEL HF CHARGER / POWERSUPPLY

### DRA 1202-4

#### DERATING

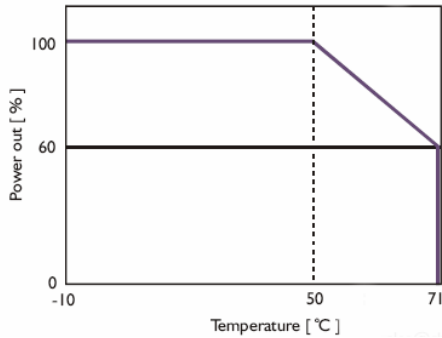

- AC/DC Power module
- Din-rail mountable
- Universal input 90~265VAC
- High efficiency up to 86%
- Class 2 output
- Short circuit protection
- Internal input filter
- 2 years warranty



<b>Input voltage range</b>	<b>90 ~ 265 VAC</b>
<b>Auto range 90~265VAC</b>	<b>YES</b>
<b>Line frequency</b>	<b>50/60Hz</b>
<b>Output voltage</b>	<b>12 VDC nominal</b>
<b>Load curve</b>	<b>I*U</b>
<b>Float voltage</b>	<b>13,8 VDC</b>
<b>Ripple &amp; Noise</b>	<b>&lt; 50 mV</b>
<b>Power @ 25°C</b>	<b>60 Watt</b>
<b>Output current</b>	<b>2,5 A</b>
<b>Efficiency</b>	<b>86 %</b>
<b>Electronic Short circuit switch</b>	<b>YES</b>
<b>Case material</b>	<b>Plastic</b>
<b>Protection grade</b>	<b>IP 21</b>
<b>Dimensions (LxWxH)</b>	<b>90 x 40,5 x 115 ±1mm</b>
<b>Weight</b>	<b>0,4 kg.</b>
<b>Approvals and standards</b>	<b>UL1950, UL508 Listed, Class 2</b>
	<b>EN60950</b>
	<b>EN50081-1 / EN55022 class B for EMI</b>
	<b>EN50082-1 / EN55024 for EMS</b>

\* User and battery are to be connected parallel.

\*\* Can be connected parallel on request.