


## INTERCEL HF CHARGER / POWERSUPPLY

### DRA 2405-4

#### DERATING

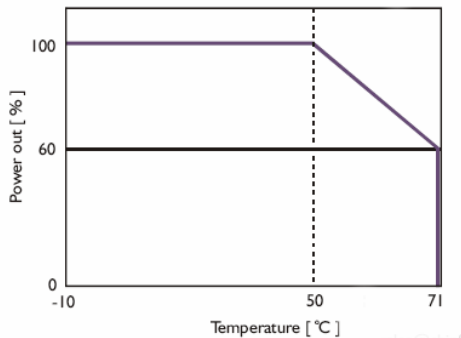

- AC/DC Power module
- Din-rail mountable
- Input voltage selectable
- High efficiency up to 87%
- Compact Design
- Short circuit protection
- Internal input filter
- 2 years warranty



<b>Input voltage range</b>	<b>90 ~ 265 VAC</b>
<b>Auto range 90~265VAC</b>	<b>Selectable</b>
<b>Line frequency</b>	<b>50/60Hz</b>
<b>Output voltage</b>	<b>24 VDC nominal</b>
<b>Load curve</b>	<b>I*U</b>
<b>Float voltage</b>	<b>27,6 VDC</b>
<b>Ripple &amp; Noise</b>	<b>&lt; 50 mV</b>
<b>Power @ 25°C</b>	<b>120 Watt</b>
<b>Output current</b>	<b>5 A</b>
<b>Efficiency</b>	<b>Up to 87 %</b>
<b>Electronic Short circuit switch</b>	<b>YES</b>
<b>Case material</b>	<b>Metal</b>
<b>Protection grade</b>	<b>IP 21</b>
<b>Dimensions (LxWxH)</b>	<b>125 x 63,5 x 126 ±1mm</b>
<b>Weight</b>	<b>0,7 kg.</b>
<b>Approvals and standards</b>	<b>UL508 Listed</b>
	<b>EN60950</b>
	<b>EN50081-1 / EN50082-2</b>
	<b>EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8,</b>

\* User and battery are to be connected parallel.

\*\* Can be connected parallel on request.