




## LEAD ACID BATTERIES FOR MULTI PURPOSE USE

### NP 10-6

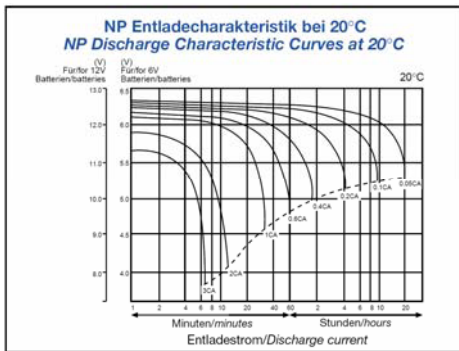

- Valve Regulated Maintenance Free
- High current drain grid being resistant to corrosion by virtue of a lead-calcium alloy
- Absorbing Glassmatt Technology (AGM)
- Classified as non-spillable and Non Dangerous goods by IATA



|   |                                 |
|---|---------------------------------|
| Nominal Voltage   | 6 V DC                          |
| Nominal Capacity:   |                                 |
| 20hr. rate of 0.5A TO 10.5V   | 10.0Ah                          |
| 3hr. rate of 2.5A TO 10.2V  | 7.5Ah                           |
| 1hr. rate of 6.0A TO 9.6V   | 6.0Ah                           |
| Internal resistance   | 18mΩ                            |
| Max. charge current   | 0,25A (2.5A)                    |
| Max. discharge current  | 70A                             |
| Operation temperature range   |                                 |
| Charge  | -15 degr. ~ 40 degr.            |
| Discharge   | -15 degr. ~ 50 degr.            |
| Storage temperature   | -15 degr. ~ 40 degr.            |
| Fast Charge / Floating charge                                       | 14,8V / 13,65 V (±0,15 V)       |
| Expected life (25 degr.)  | 3-5 years in float charging     |
| Standard terminal   | Faston Tab 187                  |
| Housing material  | ABS (Acrylonitirbutadienstyren) |
| Dimensions (LxWxH)  | 151 x 50 x 94 (97.5mm.) ±1mm    |
| Weight  | 2,0kg.                          |
| Can be operated, charged or stored in any position without leakage. |                                 |
| Can not be charged while the terminal is downward.                  |                                 |

